

UT Health Science Center: RS001 Chemical Hygiene Plan	
Version 3	Publication Date: 02/06/2026

Objective

The University of Tennessee Health Science Center (UTHSC) is committed to providing a healthy and safe work environment for the campus community. This Chemical Hygiene Plan (CHP) establishes a formal written program for protecting laboratory personnel against health and safety hazards associated with exposure to hazardous chemicals and must be made available to all employees working with hazardous chemicals in a laboratory setting. The CHP describes the proper use and handling procedures to be followed by faculty, staff, and all other personnel working with hazardous chemicals in laboratory settings.

This procedure will meet the requirements of a chemical hygiene plan, as defined by the U.S. Occupational Safety and Health Act (OSHA) of 1970 and regulations of the U.S. Department of Labor including 29 CFR 1910.1450 "Occupational Exposure to Hazardous Chemicals in Laboratories" (the "Laboratory Standard").

Scope

The CHP applies to all UT Health Science Center laboratories that use, store, or handle hazardous chemicals and all personnel (i.e., employees, students and visitors) who work in these facilities.

Roles

- **Principal investigator or Laboratory Supervisor Responsibilities**
The Laboratory Supervisor is the individual ultimately responsible for the overall laboratory operation, including the lab safety program, and ensuring that the requirements of the CHP are followed by all staff members that work in the lab. For most research laboratories, the Principal Investigator (PI) is the Laboratory Supervisor. In cases where the PI has hired an individual such as a lab manager or senior researcher to manage the daily operations of the lab the PI is still ultimately responsible for the overall operation of the lab and is considered the Laboratory Supervisor. Since the Laboratory Supervisor does not necessarily have a routine presence within the lab it is appropriate to delegate some safety duties to a qualified individual. Examples of such delegated responsibilities includes ensuring compliance with SOPs, PPE, updating of chemical inventories, etc. Ultimately, however, the Laboratory Supervisor remains responsible for the safety of all personnel working in the laboratory.

UT Health Science Center: RS001 Chemical Hygiene Plan	
Version 3	Publication Date: 02/06/2026

Specifically, the Laboratory Supervisor must:

- Understand applicable environmental health and safety rules, including the contents of the CHP.
 - Assess hazards in the laboratory, document this assessment, and instruct lab personnel to properly mitigate the risk associated with these hazards. This may be through the use of engineering controls (e.g. fume hood), administrative controls (e.g. work practices) or PPE.
 - Establish SOPs to effectively control or reduce hazards associated with highly hazardous materials.
 - Ensure that all laboratory personnel that work with hazardous chemicals receive appropriate training. This includes providing training for lab-specific hazards such as hazards and handling precautions for hazardous chemicals, proper use of equipment, etc.
 - Maintain written records of lab-specific training (e.g., PPE training, review of IBC protocols, etc.).
 - Ensure that appropriate PPE (e.g., laboratory coats, gloves, eye protection, etc.) and engineering control equipment (e.g., chemical fume hood) are made available, in good working order, and being used properly.
 - Conduct periodic lab inspections and immediately take steps to abate hazards that may pose a risk to life or safety upon discovery of such hazards.
 - Maintain an accurate inventory of hazardous chemicals stored or handled within their work areas.
 - Actively enforce all applicable safety procedures and ensure that the CHP is followed by lab staff and all visitors, including having a progressive disciplinary process for lab staff members that do not comply with safety rules.
- **Laboratory Employee Responsibilities**
All employees (e.g., researchers, graduate research assistants, graduate students, undergraduate students, lab technicians, post-doctoral researchers, and visiting scientists) in laboratories that use, handle, or store hazardous chemicals must:
 - Work in a manner that minimizes exposure to hazardous chemicals.
 - Review and follow the requirements of the CHP.
 - Follow all verbal and written laboratory safety rules, regulations, and SOPs required for the tasks assigned.
 - Develop and practice good personal chemical hygiene habits such keeping work areas clean and uncluttered.
 - Plan, review, and understand the hazards of materials and processes in the laboratory prior to conducting work.

UT Health Science Center: RS001 Chemical Hygiene Plan	
Version 3	Publication Date: 02/06/2026

- Utilize appropriate measures to control hazards, including consistent and proper use of engineering controls, administrative controls, and PPE.
- Understand the capabilities and limitations of PPE.
- Immediately report all accidents, near misses, and unsafe conditions to the Laboratory Supervisor.
- Complete all required safety training and provide written documentation to the Laboratory Supervisor.
- Participate in the medical surveillance program when required.
- Inform the Laboratory Supervisor of any work modifications ordered by a physician as a result of medical surveillance, occupational injury, or chemical exposure.

- **Laboratory Safety Officer Responsibilities**

It is highly recommended that each Laboratory Supervisor establish a Laboratory Safety Officer to manage the daily operations of the lab’s safety program. The Laboratory Safety Officer may also operate as the Chemical Hygiene Officer for the laboratory. The Laboratory Supervisor should empower the Laboratory Safety Officer to enforce requirements of this CHP among other lab personnel. The Laboratory Safety Officer should be familiar with how the lab operates and have demonstrated lab safety experience (e.g., senior graduate student, post-doc, lab manager).

The role of the Laboratory Safety Officer could include the following responsibilities:

- Direct new lab personnel to appropriate training and ensure that the training is properly documented.
 - Enforce lab safety rules.
 - Update hazardous chemical inventory.
 - Flush emergency eyewash stations on a weekly basis.
 - Report safety issues back to the Laboratory Supervisor when necessary;
 - Contact the Office of Research Safety and follow up with them as necessary to resolve safety issues within the laboratory.
- **Non-Laboratory Personnel/Support Staff Responsibilities:**
Housekeeping and Facilities maintenance staff (support staff) may enter laboratories to perform routine tasks such as cleaning and equipment maintenance. Support staff members are expected to follow the posted safety rules of each laboratory. Minimum PPE requirements for support staff working in a laboratory are long pants, closed-toe shoes, safety glasses and gloves. If additional PPE is required or if other unique safety requirements must be followed, it is the responsibility of laboratory personnel to notify support staff. These additional requirements

UT Health Science Center: RS001 Chemical Hygiene Plan	
Version 3	Publication Date: 02/06/2026

should be clearly communicated to support staff. Posting the requirements on the lab door or somewhere else highly visible is recommended.

- **Chemical Hygiene Officer Responsibilities:**
The Chemical Hygiene Officer has the primary responsibility for ensuring the implementation of all components of the CHP. The Director of the Office of Research Safety Affairs is the the Chemical Hygiene Officer for the institution. Individual departments or laboratories are encouraged to designate a Chemical Hygiene Officer for their department or lab. The Chemical Hygiene Officer must:
 - Inform Laboratory Supervisors of all health and safety requirements and assist with the selection of appropriate safety controls (engineering controls, administrative controls, and PPE).
 - Ensure that Laboratory Supervisors have the necessary resources to maintain compliance with the CHP and that all lab staff receive appropriate training.
 - Conduct periodic lab inspections and immediately take steps to abate hazards that may pose a risk to life or safety upon discovery of such hazards.
 - Ensure that SOPs and hazard assessments are being prepared.
 - Maintain employee exposure-monitoring records, when applicable.
 - Help to develop and implement appropriate environmental health and safety policies and procedures.
 - Review and evaluate the effectiveness of the CHP program at least annually and update it as appropriate.
 - Actively enforce all applicable safety procedures and ensure the contents of the CHP are followed and take appropriate actions when safety procedures are not followed.

Definitions

Chemical Hygiene Officer (CHO) - Individual with the responsibility as defined in the OSHA Laboratory Standard to implement the Chemical Hygiene Plan thus ensuring compliance with the regulatory requirements and maintaining a safe work environment.

Hazardous substance - Any substance capable of causing an acute or chronic health condition in humans or adversely impacting the environment. Substances that are considered physical hazards (flammable substances, explosives, shock sensitive, etc.) are included in the definition of a hazardous substance. The OSHA Hazard Communication Standard, 29 CFR 1910.1200 and the OSHA Chemical Hygiene Plan 29 CFR 1910.1450 are the two main standards that define a hazardous substance

UT Health Science Center: RS001 Chemical Hygiene Plan	
Version 3	Publication Date: 02/06/2026

Permissible Exposure Limit (PEL)-An exposure limit that is published and enforced by OSHA as a legal standard. PEL may be either a time-weighted average (TWA) exposure limit (8 hour), a 15-minute short term exposure limit (STEL), or a ceiling (C).

Laboratory Safety Officer - Individual delegated by the Laboratory Supervisor to have responsibility for lab safety and compliance and the authority to implement corrective actions within the lab. Since PIs or Lab Supervisors are not often in the lab and may have limited time to tend to administrative and regulatory responsibilities the presence of a Lab Safety Officer is useful in promoting compliance in research work areas.

Laboratory Supervisor - Individual responsible for day-to-day supervision or oversight of the laboratory operation and personnel working in the laboratory. This is often the Principal investigator of a grant funded laboratory.

Laboratory use of hazardous chemicals means handling or use of such chemicals in which all of the following conditions are met:

- Chemical manipulations are carried out on a "laboratory scale;"
- Multiple chemical procedures or chemicals are used;
- The procedures involved are not part of a production process, nor in any way simulate a production process; and
- "Protective laboratory practices and equipment" are available and in common use to minimize the potential for employee exposure to hazardous chemicals.

Principal Investigator (PI) - The holder of an independent grant administered by a university and the lead researcher for the grant project, usually in the sciences, such as a laboratory study or a clinical trial. The phrase is also often used as a synonym for "head of the laboratory" or "research group leader."

Safety Data Sheet (SDS) - Written or printed material concerning a hazardous chemical that is prepared in accordance with the OSHA Hazard Communication Standard (29 CFR 1910.1200). Formerly known as Materials Safety Data Sheets (MSDS), an SDS contains information on the potential health effects of exposure to chemicals, or other potentially dangerous substances, and on safe working procedures when handling chemical products.

Standard Operating Procedures (SOPs) - A set of step-by-step instructions compiled by an organization to help workers carry out complex routine operations. SOPs aim to achieve efficiency, quality output and uniformity of performance and provide for the safety of researchers while reducing miscommunication and failure to comply with regulations.

UT Health Science Center: RS001 Chemical Hygiene Plan	
Version 3	Publication Date: 02/06/2026

Designated Area - An area which may be used for work with "select" carcinogens, reproductive toxins or substances which have a high degree of acute toxicity. A designated area may be the entire laboratory, an area of a laboratory or a device such as a laboratory hood.

Procedure

UNIVERSAL LABORATORY SAFETY PRACTICES

Certain laboratory safety practices apply to all laboratories or research areas where hazardous chemicals may be handled. These practices must be followed by all personnel working within such areas and shall be enforced by the Laboratory Supervisor:

- Employees shall not eat, drink, smoke, or apply cosmetics within a laboratory.
- Employees shall not wear open toed shoes or perforated shoes.
- Employees shall not wear shorts, skirts or dresses that do not provide skin coverage to at least below the knee. Pants are strongly preferred.
- Whenever feasible, employees should handle hazardous chemicals within a laboratory chemical hood.
- Employees shall not block access to exit doors, fire extinguishers, fire alarm pull stations, eyewash stations, emergency showers or other emergency equipment.
- Employees shall not leave laboratory experiments unattended.
- Employees shall wash hands after handling hazardous chemicals.
- Employees shall keep long hair (longer than shoulder length) tied back.
- Employees shall keep container sizes and quantities on hand as small as possible; such quantities shall be consistent with the rate of use. Employees should only purchase quantities necessary for experiments and procedures occurring in the immediate future.
- Employees shall keep work areas, where hazardous chemicals are handled, clean and uncluttered.

HAZARD COMMUNICATION

Due to the variety of chemicals located across the campus it is the responsibility of supervisors to ensure that staff members are aware of the hazards associated with the chemicals in their work area. This shall be done through labelling, the maintenance of a hazardous chemical inventory, Safety Data Sheets, and training.

- Labelling
Existing labels on incoming containers of hazardous chemicals shall not be removed or defaced, unless the container is immediately marked with the required information. All chemical containers present in the laboratory, whether hazardous or not, should be properly labeled to identify the contents.

UT Health Science Center: RS001 Chemical Hygiene Plan	
Version 3	Publication Date: 02/06/2026

Chemicals handled in a manner meeting the definition of laboratory use should be labeled with at least the chemical name and hazard warnings whenever possible.

Hazardous chemical containers not utilized for laboratory use (e.g., spray bottle of disinfectant) shall be labeled, tagged or marked with the following information:

- Identity of the hazardous chemical or chemical product
- Appropriate hazard warnings, including words, pictures, and/or symbols, which provide general information regarding the hazards of the chemicals. (The NFPA diamond hazard rating system is an acceptable means of describing the appropriate hazard warnings.)

Food, beverages, and drugs in solid final form ready for administration to a patient are exempted from the labeling requirements.

- **Chemical Inventories**
Departments that handle, use or store hazardous chemicals are required to maintain an inventory of such chemicals. This inventory will be maintained on the EHS Assistant online database accessible through the Office of Research Safety Affairs website. Laboratory Supervisors must review and update the chemical inventory as often as necessary to ensure its accuracy, but at least annually.

Generally, all hazardous chemicals, compressed gases, hazardous drugs, chemotherapy agents, contrast media, and other pharmaceuticals should be listed on the hazardous chemical inventory. TOSHA defines a hazardous chemical as a substance (liquid, solid, gas, vapor, aerosol, fume, dust or mist) which is a physical hazard or a health hazard. A health hazard is a chemical for which there is statistically significant evidence based on at least one study conducted in accordance with established scientific principles that acute or chronic health effects may occur in exposed employees. A health hazard may include chemicals which are carcinogens, toxic or highly toxic agents, reproductive toxins, irritants, corrosives, sensitizers, hepatotoxins, nephrotoxins, neurotoxins, agents which act on the hematopoietic system, and agents which damage the lungs, skin, eyes, or mucous membranes. A physical hazard is a chemical for which there is scientifically valid evidence that it is a combustible liquid, a compressed gas, explosive, flammable, an organic peroxide, an oxidizer, pyrophoric, unstable (reactive) or water reactive.

Select items are exempt from being included on a hazardous chemical inventory:

- Food and beverages are exempt.
- The following pharmaceuticals are exempt:

UT Health Science Center: RS001 Chemical Hygiene Plan	
Version 3	Publication Date: 02/06/2026

- Drugs when they are in their solid final form for direct administration to a patient (e.g., tablets, pills, and creams),
 - Over-the-counter drugs (not requiring a prescription), and
 - First aid kits (for employee use).
 - Hazardous waste and radioactive materials are exempt.
 - Biohazardous materials, culture media and blood culture bottles are exempt.
 - Alcohol gel dispensers mounted on the wall or sitting on desks are exempt. However, if multiple containers of alcohol gel are kept in a central storage location, such containers should be listed on the inventory.
 - “Articles” and “consumer products” are exempt. An “article” is any manufactured item other than a fluid or particle which, 1) is formed to a specific shape or design during manufacture, 2) has end use function(s) dependent in whole or in part upon its shape or design during end use, and 3) which under normal conditions of use does not release more than very small quantities, e.g., minute or trace amounts of a hazardous chemical and does not pose a physical hazard or health risk to employees. A “consumer product” is any article, or component part thereof, produced or distributed 1) for sale to a consumer for use in or around a permanent or temporary household or residence, a school, in recreation, or otherwise, or 2) for the personal use, consumption or enjoyment of a consumer in or around a permanent or temporary household or residence, a school, in recreation, or otherwise. Examples of exempt “articles” and “consumer products” include liquid paper, alkaline batteries, Sani-wipes, cleaning products (at an employee’s desk), and printer cartridges. Consumer products that are used in a manner that is consistent with how one would use such products at home are exempt. For example, Windex Cleaner kept at an employee’s desk for periodic cleaning of his/her desk is exempt. However, if a housekeeper uses Windex Cleaner multiple times per day for execution of his/her work duties, such cleaners should be included on the inventory.
- **Safety Data Sheets (SDS)**
 Laboratory supervisors (e.g., Principal Investigators) are responsible for maintaining SDS for the hazardous chemicals handled in laboratories. SDS must be readily accessible to laboratory personnel (e.g., printed or saved on a computer accessible to lab personnel). Laboratory personnel should use the SDS as a resource to obtain information about hazards and safety precautions. Work areas where employees do not have access to a computer must maintain hard copies of SDS for the hazardous chemicals handled in that area.
 - **Training**
 General hazard communication training is provided by the Office of Research Safety Affairs and is a component of the annual training requirement for all researchers. This content includes

UT Health Science Center: RS001 Chemical Hygiene Plan	
Version 3	Publication Date: 02/06/2026

labelling requirements, SDS access, and the recognition of warning signs such as GHS pictograms as required by OSHA. This does not complete the hazard communication requirement for employees. Work area supervisors are required to provide additional training on the hazards associated with the specific chemicals present in each employee's work area. This training must include, at a minimum, the health hazards associated with each chemical, the signs and symptoms of exposure and appropriate actions to take in the event of an exposure.

LABORATORY HAZARD ASSESSMENT

Supervisors are responsible for assessing the hazards associated with the use of chemicals and other hazardous agents in laboratories. In accordance with OSHA Standard 29 CFR 1910.132 this assessment must be documented through a written certification that identifies the workplace evaluated; the person certifying that the evaluation has been performed; the date(s) of the hazard assessment; and, which identifies the document as a certification of hazard assessment. The Laboratory Hazard Assessment (shown in Figure 1) must be posted on the door to the laboratory work area.

If hazards are present, or likely to be present, the laboratory supervisor shall ensure employees utilize proper controls to limit exposures to such hazardous chemicals. Hazards are controlled with engineered systems (e.g., fume hoods, containment devices, ventilation, etc.), work practices, and/or personal protective equipment (PPE).

When assessing hazards, supervisors should consider the following steps:

1. List the job tasks
2. Identify the hazards associated with each job task
3. Identify control(s) for each hazard
4. Implement control(s)
5. Educate affected employees
6. Evaluate effectiveness of the control(s).

Laboratory Supervisors are encouraged to consult with the Office of Research Safety when assessing procedures that may be deemed as highly hazardous. When completed by the Laboratory Supervisor or a representative from the Office of Research Safety the following form meets the criteria for a workplace hazard assessment. It may be obtained from the Office of Research Safety.

UT Health Science Center: RS001 Chemical Hygiene Plan	
Version 3	Publication Date: 02/06/2026



THE UNIVERSITY OF
TENNESSEE
HEALTH SCIENCE CENTER

Building: _____ Room #: _____
 Department: _____
 Lab Type: _____ Rev. Date: _____
 Principal Investigator(s): _____

CAUTION: The Selected Hazards May Be Present

BIOHAZARD					
BSL: _____	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
CAUTION RADIOACTIVE MATERIAL					
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

OTHER HAZARDS

<input type="checkbox"/> Laser(s) (Class _____)	<input type="checkbox"/> Air/Water Reactive
<input type="checkbox"/> X-Ray Equipment	<input type="checkbox"/> Hazardous Waste Storage
<input type="checkbox"/> Magnets (high power)	<input type="checkbox"/> Cryogenic Materials
<input type="checkbox"/> Lab Animal Allergens	

SPECIAL HAZARDS OR PRECAUTIONS

PPE USED IN LAB

<input type="checkbox"/> Safety Glasses	<input type="checkbox"/> Latex Gloves
<input type="checkbox"/> Safety Goggles	<input type="checkbox"/> Nitrile Gloves
<input type="checkbox"/> Face Shield	<input type="checkbox"/> Cryogenic or Thermal
<input type="checkbox"/> Lab Coat	

Contact Information	Emergency Contact
Primary Contact (PI) _____ Office Phone _____ After Hours Phone _____ Secondary Contact _____ Office Phone _____ After Hours Phone _____ Department Head _____ Office Phone _____ After Hours Phone _____	Police/Fire/Medical: 448.4444 UT Campus Police: 448.4444 Research Safety: 448.6114 Facilities Services: 448.5661
	Information is to be updated as information changes or annually, whichever comes first. For questions about this posting please contact Research Safety.

Figure 1: Laboratory Workplace Hazard Assessment

HIERARCHY OF CONTROLS

Employees are required to work in a manner that minimizes their exposure to hazardous chemicals. Laboratory safety controls are used to minimize the potential for exposure to these chemicals. Lab safety controls include engineering controls (e.g. fume hoods), administrative controls (e.g. work practices), and PPE. Elements of these three categories should be used in a layered approach to minimize employee exposure to hazardous chemicals. The hierarchy of controls prioritizes hazard mitigation strategies on the premise that the best way to control a hazard is to systematically eliminate it from the workplace or substitute a less hazardous technique, process, or material. If elimination or substitution are not feasible options, administrative controls, engineering controls, and PPE must be used to provide the necessary protection.

Laboratory employees are responsible for practicing good chemical hygiene at all times. To do this the employee must be familiar with the four routes of exposure in which hazardous substances can enter the body: inhalation, absorption, ingestion, and injection. Of these, the most likely routes of exposure in the laboratory are by inhalation or skin absorption. Many hazardous chemicals may affect people through more than one of these exposure routes, so it is critical that protective measures are in place for each of these exposure routes. For each laboratory procedure employees should

UT Health Science Center: RS001 Chemical Hygiene Plan	
Version 3	Publication Date: 02/06/2026

evaluate the potential routes of exposure and apply the hierarchy of controls to mitigate the risk associated with that procedure.

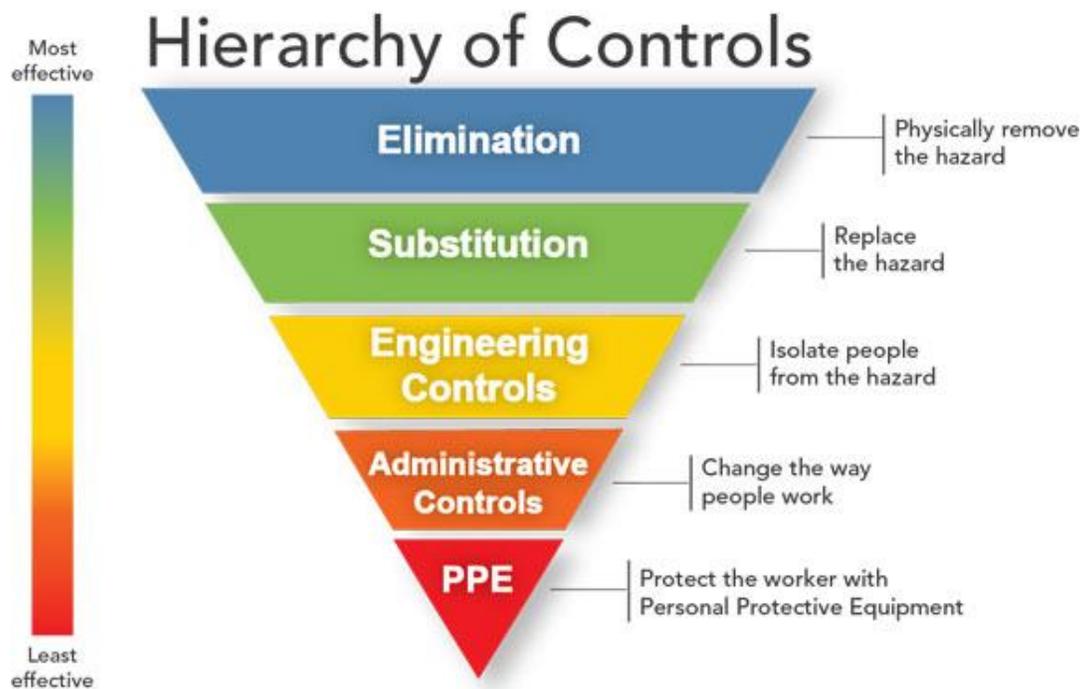


Figure 2: Hierarchy of Controls

ENGINEERING CONTROLS

Engineering controls eliminate or reduce exposure to chemical or physical hazards through the use or substitution of engineered machinery or equipment. Common forms of engineering controls often employed in the laboratory include equipment to isolate the operator or the process (e.g., use of a glove box when handling air- or water-sensitive chemicals); and use of forced ventilation systems (e.g., chemical fume hood, biological safety cabinet).

- **Chemical Fume Hoods**
Laboratory chemical hoods are designed to partially enclose processes and or equipment that generate air contaminants such as gases, vapors, fumes or particulates. Whenever possible, employees should handle hazardous chemicals within laboratory chemical hoods. The location of a laboratory chemical hood affects its effectiveness in capturing and/or containing air contaminants. Ideally, laboratory chemical hoods should be located in an area of minimal traffic.

UT Health Science Center: RS001 Chemical Hygiene Plan	
Version 3	Publication Date: 02/06/2026

When a person walks by a laboratory chemical hood, turbulence can be created near the hood face causing contaminants to be drawn outside the hood.

Laboratory chemical hoods shall be evaluated annually by the Office of Research Safety. The evaluation shall include a face velocity test, airflow visualization test, and airflow alarm assessment test. Each laboratory chemical hood shall be labeled with a sticker indicating the last successful evaluation date for such hood. Laboratory employees must contact Facilities or the Office of Research Safety when a fume hood is not working properly or if the airflow monitor is in alarm.

If a chemical fume hood is required or recommended to be used, the following guidelines must be followed at all times:

- Chemical fume hoods must be marked to indicate the proper sash position for optimum hood performance. The chemical fume hood sash should be positioned at or below this height whenever working with hazardous chemicals that could generate toxic gases, vapors, fumes, aerosols or particulates.
 - Most chemical fume hoods are not intended to be used with the sash fully open. The sash should only be fully opened to add or remove equipment from the chemical fume hood. Although the sash provides some splash protection employees must wear eye protection when handling hazardous chemicals within the Fume hood.
 - Only apparatus and chemicals essential to the specific procedure or process should be placed in the chemical fume hood. Extraneous materials from previous experiments should be removed and stored in a safe location outside the chemical fume hood.
 - Chemical fume hoods used for experimental work should not be used for chemical or equipment storage. Fume hoods used for chemical storage should only be used for storage; experimental work should not be conducted in these hoods.
 - Never put your head inside of an operating chemical fume hood.
-
- **Biosafety Cabinets (BSC)**
A biosafety cabinet is a specific type of enclosed, ventilated laboratory workspace. These units are engineered to provide protection to personnel, the product being handled on the work surface and the environment. Biosafety cabinets are primarily used for protection used for safely working with materials contaminated with (or potentially contaminated with) infectious materials. They are primarily used to provide worker protection from infectious materials and to protect materials being handled on the work surface from biological contamination. Biosafety

UT Health Science Center: RS001 Chemical Hygiene Plan	
Version 3	Publication Date: 02/06/2026

cabinets must be certified annually in accordance with the field certification procedures detailed in NSF/ANSI 49: Biosafety Cabinet Certification.

The Type A2 biosafety cabinet is the most common type on campus. This type of cabinet relies on HEPA filters to remove aerosols and particulates from the air and is not intended for use with hazardous gases or vapors. Applications that involve the use of chemicals should be conducted in chemical fume hoods.

- **Laminar Flow Clean Bench**
A laminar flow clean bench is a partially enclosed bench designed to prevent contamination of the work surface. Air is drawn through a high efficiency particulate air filter and blown in a very smooth, laminar flow towards the user. It is critical that absolutely no hazardous chemicals, infectious and/or radioactive materials ever be used in a laminar flow clean bench, as the vapors are blown directly towards the user. The handling of laboratory animals on a laminar flow clean bench should also be avoided as it may increase researcher exposure to lab animal allergens.
- **Other Engineering Containment Devices**
Other engineered containment devices may be used for specific applications, including pathology workstations, canopy hoods, perchloric acid hoods, and ductless hoods. Pathology workstations are specially designed for the gross examination and sectioning of pathology specimens. Some models include formaldehyde neutralizing filters; others are connected to facility exhaust systems. The Office of Research Safety shall evaluate pathology workstations annually to verify they are functioning as intended by the manufacturer. Owners of a pathology workstation shall be responsible for notifying the Office of Research Safety of the presence of pathology workstations in a specific work area. The owner shall also be responsible for changing formaldehyde neutralizing filters as specified by the manufacturer.

Canopy hoods are specifically designed to vent non-toxic materials such as heat, steam and odors from large or bulky apparatus such as ovens, steam baths and autoclaves. The hood may be installed on a wall or suspended from the ceiling for peninsular and corner locations. Canopy hoods are connected to facility exhaust systems.

Perchloric acid hoods are specifically designed for procedures involving perchloric acid. Perchloric acid is a strong oxidizer, which can produce corrosive, flammable, and/or explosive reaction products. The surfaces of the hood and ductwork are constructed of materials that will be stable and not react with perchloric acid to form corrosive flammable, and/or explosive compounds. Interior hood, duct, fan and stack surfaces are equipped with a water wash-down

UT Health Science Center: RS001 Chemical Hygiene Plan	
Version 3	Publication Date: 02/06/2026

system. Perchloric acid hoods shall be prominently labeled “Perchloric Acid Hood.” The Office of Research Safety shall evaluate perchloric acid hoods annually to verify they are functioning as intended by the manufacturer.

Ductless hoods incorporate an exhaust fan and filter(s) into the unit; filtered air is discharged directly into the room (instead of being connected to a facility exhaust system). Ductless hoods may be used for limited applications. Owners of ductless hoods must notify the Office of Research Safety of the intent to use this equipment on campus. The Office of Research Safety shall perform a hazard evaluation and analysis for each ductless hood prior to first use to verify the hood is appropriate for the intended purpose. The Office of Research Safety shall evaluate ductless hoods annually to verify they are functioning as intended by the manufacturer.

PERSONAL PROTECTIVE EQUIPMENT

Supervisors shall assess the workplaces of their employees to determine if hazards are present, or are likely to be present, which necessitate the use of personal protective equipment (PPE). The Laboratory Supervisor will select and have each affected employee use the types of PPE that will protect them from the hazards identified in the hazard assessment. To promote compliance with PPE requirements and to encourage enforcement Laboratory Supervisors must establish clear policies to delineate when the use of PPE is required. For example, “staff members must wear a lab coat and eye protection when working at the lab bench.” The Office of Research Safety Affairs is available on request to assist with the selection or assignment of appropriate PPE.

Supervisors shall provide PPE training to employees required to use PPE. Training shall include the following:

- When PPE is necessary
- What PPE is necessary
- How to properly don, doff, adjust, and wear PPE
- Limitations of the PPE
- Proper care, maintenance, useful life and disposal of the PPE.

Such training shall be provided before employees perform work requiring the use of PPE. Re-training is required under the following circumstances:

- Changes in the workplace render previous training obsolete
 - Changes in the types of PPE to be used render previous training obsolete
 - An affected employee demonstrates a lack of understanding of proper use of the PPE.
-
- Body Protection (e.g. lab coats)

UT Health Science Center: RS001 Chemical Hygiene Plan	
Version 3	Publication Date: 02/06/2026

Each affected employee must wear protective clothing to protect the body from recognized hazards. Unprotected skin surfaces that are at risk of injury should be covered. Full length pants or a full-length skirt must be worn by all individuals that are occupying the laboratory area; shorts are not permitted. Lab coats, coveralls, aprons, or protective suits are required to be worn while working on, or adjacent to, all procedures using hazardous chemicals or infectious materials at biosafety level 2 or higher.

Lab coats must be appropriately sized for the individual and be fastened (snap buttons are recommended) to their full length. Lab coat sleeves must be of sufficient length to prevent skin exposure while wearing gloves. Flame resistant lab coats must be worn when using pyrophoric materials or flammable liquids greater than 1 liter in volume.

Lab coats should not be worn outside of the lab unless the individual is traveling directly to an adjacent lab work area. Lab coats should not be worn in common areas such as break rooms, offices, or restrooms. Each department is responsible for providing laundry services as needed to maintain the hygiene of laboratory coats. They may not be cleaned by staff members at private residences or public laundry facilities. Alternatives to laundering lab coats include routinely purchasing new lab coats for employees to replace contaminated lab coats, hiring a professional garment laundering service, or using disposable lab coats. Departments can also choose to purchase a washer and dryer and launder their own lab coats.

- **Eye and Face Protection**

Laboratory personnel must wear eye protection when handling hazardous chemicals in the lab. All eye protection equipment must be American National Standards Institute (ANSI) approved and appropriate for the work being done. Eye and face protection may not be required in the lab if the employee is sitting at a workstation or desk that is away from chemical processes (e.g., working at a desktop computer, having a lab meeting at a table not adjacent to hazardous operations).

Face protection equipment must be used in conjunction with eye protection when potentially exposed to hazards from chemical splash, flying debris, or other exposures (e.g. UV light) that may occur in the laboratory.

- **Hand/Skin Protection**

Employees must wear chemical protective clothing and/or gloves to minimize potential skin exposures to hazardous chemicals. No single glove or clothing article provides protection against

UT Health Science Center: RS001 Chemical Hygiene Plan	
Version 3	Publication Date: 02/06/2026

all hazards. Employees should only use chemical protective clothing and gloves that are resistant to the hazardous chemicals of concern. Employees may also need gloves or protective clothing that provides puncture resistance and/or thermal protection.

Manufacturers of protective clothing and gloves publish chemical resistance, thermal protection and puncture resistance data for their protective clothing and gloves. Chemical resistance data may include permeation, degradation and penetration information. For work with hazardous chemicals, the selected chemical protective clothing or glove should resist permeation, degradation, and penetration by the respective chemicals.

SAFETY EQUIPMENT

Safety equipment is located in work areas so that it is available to employees in the event of a hazardous agent exposure or other incident. The specific operations conducted in a work area will determine what safety equipment should be available. This equipment must be properly maintained so that it is accessible and functional when needed. Access to safety equipment must not be obstructed. Researchers are responsible for the upkeep of the safety equipment in their work area. This includes maintaining equipment in a clean and sanitary manner, replacing items as they are used or expire, or notifying Facilities if something is not functioning properly or if a fire extinguisher has been used and needs to be replaced.

- **Emergency Eyewash and Showers**
All laboratories using corrosive chemicals must have immediate access to safety showers and eye wash stations. All lab personnel must be aware of the location and know how to properly use the safety shower and eyewash stations. Laboratory employees are responsible for flushing eyewash stations on a weekly basis. This will keep the system free of sediment and prevent bacterial growth that may be hazardous to employees. This flush should be documented on the Weekly Eyewash Inspection Form. Any operational deficiencies with emergency eyewash station must be reported immediately to Facilities.
 - A.
- **Fire Extinguishers**
Fire extinguishers must be available in locations and in accordance with procedures detailed in campus safety policy FS5300 – Fire Prevention Plan. They must be mounted in locations that are free of clutter or obstruction in accordance with campus safety policy FS5302 – Portable Fire Extinguishers.

All laboratory personnel should be familiar with the location, use, and classification of the extinguishers in their laboratory. Ensure that the fire extinguisher being used is appropriate for

UT Health Science Center: RS001 Chemical Hygiene Plan	
Version 3	Publication Date: 02/06/2026

the type of material on fire before attempting to extinguish any fire. Laboratory personnel are not required to extinguish fires that occur in their work areas and should not attempt to do so unless:

- It is a small, contained fire that can be quickly and safely extinguished (e.g., small trashcan sized fire);
- Appropriate training has been received and the individual feels the fire can be safely extinguished; and
- It is necessary to extinguish a fire in order to safely exit an area (e.g., fire is blocking an exit).

If a fire occurs in the laboratory and is extinguished by lab personnel, the fire alarm must be pulled and the fire department must be contacted. It is common for fires to re-ignite so it is critical that the Fire Department be contacted even if the fire has been extinguished by an employee.

CHEMICAL MANAGEMENT

The proper management of hazardous chemicals includes procurement practices, labeling, storage, safe handling and disposal. Upon receipt chemicals should be labeled with the date they were received. Manufacturer labels or secondary labels must be maintained in accordance with the practices established in the Hazard Communication section of this Chemical Hygiene Plan. Practices for the safe storage and handling of hazardous chemicals is provided below.

- **Procurement**
Hazardous chemicals should be procured in the smallest volume or quantity necessary to perform planned experiments. The speculative accumulation or stockpiling of hazardous chemicals is prohibited. Once received hazardous chemicals must be added to the hazardous chemical inventory maintained for each work area as detailed in the Hazard Communication section of this Chemical Hygiene Plan.
- **Standard Operating Procedures**
Laboratory supervisors shall maintain standard operating procedures (SOPs) for activities that involve the handling of highly hazardous chemicals. SOPs shall identify the control measures (e.g. engineering controls, work practices, PPE) used to mitigate hazards associated with that procedure. Researchers must be trained on the SOPs that they are to follow. These SOPs must be maintained in a location that is readily accessible to the researchers performing the procedure. The Office of Research Safety Affairs recommends that researchers sign and date each SOPs to properly document completion of this training.

UT Health Science Center: RS001 Chemical Hygiene Plan	
Version 3	Publication Date: 02/06/2026

- **Chemical Storage**
Acceptable chemical storage locations may include flammable cabinets, corrosive cabinets, fume hood cabinets, secure laboratory shelves, or appropriate laboratory refrigerators or freezers. Chemical fume hoods should not be used as permanent chemical storage areas, unless designated as such. Not only does this create potentially unsafe conditions by having extraneous chemicals stored near chemical reactions and processes, excess chemical bottles in the hood may also seriously impair the ventilating capacity of the fume hood. Only chemicals being used in the process or experiment being conducted in the fume hood may be stored in the fume hood and should be removed when the process or experiment is complete.

Avoid storing any chemical containers on the floor unless those chemicals are placed in suitable secondary containment. Under no circumstance may chemical containers, or anything else, be stored in aisle ways, corridors, or in front of doors. Hazardous liquids should not be stored on shelves above eye-level unless there is a SOP detailing safe handling procedures. Chemicals must be stored at an appropriate temperature and humidity level and never be stored in direct sunlight. Always follow the chemical manufacturer's storage instructions, if provided.

Chemicals must be stored in a manner that segregates chemicals of incompatible hazard classes. Specific guidance for the proper storage of chemicals can be found in the SDS for each chemical. If storage space is limited proper chemical segregation can be accomplished by using secondary containment to separate incompatible materials stored within the same storage location. Generally, proper segregation can be achieved by separating chemicals into the following storage groups.

- Acids (oxidizing)
 - Acids (organic)
 - Bases
 - Flammable materials
 - Oxidizers (store away from combustible materials);
 - Reactive and acutely toxic materials (stored away from all other chemicals)
- **Flammable Liquids**
Flammable liquids represent a fire risk. Flammable liquids include any liquid with a flash point no greater than 93 °C (200 °F). At a temperature above its flashpoint a flammable liquid produces enough vapors near its surface to form a flammable atmosphere. The fire risk increases

UT Health Science Center: RS001 Chemical Hygiene Plan	
Version 3	Publication Date: 02/06/2026

with the volume of the container and the volatility of the flammable liquid being handled. The smallest-volume container capable of effectively fulfilling a particular need should be selected.

The following guidelines for storing flammable liquids must be followed in all laboratories:

- Containers of flammable liquids shall be kept closed except during transfer of contents.
 - The volume of flammable liquids within laboratories shall be limited to only what is necessary for experiments occurring in the immediate future. Flammable liquids in excess of what is required for immediately pending experiments shall be stored in safety cans, flammable liquid cabinets and/or inside storage rooms.
 - Domestic refrigerators or freezers must never be used to store flammable liquids. Flammable liquids can only be stored in refrigerators or freezers that are designed for flammable materials (Note: most refrigerators and freezers are not intended for flammable storage).
 - Flammable liquids must be stored in well-ventilated areas free from ignition sources.
 - No more than 60 gallons (225 liters) of flammable liquids may be stored in a flammable liquid storage cabinet. No individual container in a storage cabinet may exceed 5 gallons (20 liters) in capacity.
-
- **Corrosive Chemicals**
Corrosive chemicals cause visible destruction and/or irreversible alteration of living tissue by chemical action at the site of contact. A hazardous chemical meeting one or more of the following criteria is considered “corrosive”:
 - Chemical is identified as corrosive on SDS
 - Chemical is identified as corrosive on container label
 - Chemical has a pH \leq 2.0 or pH \geq 11.5

Employees should handle corrosive chemicals within a laboratory chemical hood. Employees are required to comply with the following work practices when handling corrosive chemicals:

- Employees shall not handle corrosive chemicals in work areas that do not have emergency eye wash and/or shower equipment
- The laboratory supervisor shall provide detailed instructions regarding appropriate personal protective equipment for tasks involving corrosive chemicals. Appropriate personal protective equipment for handling corrosive chemicals may include chemical resistant gloves, chemical-resistant apron, splash goggles, and face shield.
- Employees shall store corrosive chemicals in designated cabinets or on shelves located below eye level.

UT Health Science Center: RS001 Chemical Hygiene Plan	
Version 3	Publication Date: 02/06/2026

- Employees shall keep container sizes and quantities on hand as small as possible.
- When employees transport corrosive chemicals between laboratories, such chemicals shall be secured to a movable cart and/or contained within packaging that meets shipping requirements of the IATA Dangerous Goods Regulations.
- Peroxide-Forming Chemicals
Peroxide-formers are a class of highly volatile, flammable, organic solvents which can form dangerous levels of peroxides. The peroxides formed are sensitive to shock and friction and can cause potentially explosive reactions. Examples of common laboratory reagents that fall into the category of peroxide-forming chemicals include diethyl ether, tetrahydrofuran, dioxanes and benzyl alcohol. Chemical containers with contents that have crystallized, have been tested and found to contain a peroxide concentration above 30 ppm, or that have been stored past their expiration date may be hazardous or may require special precautions to facilitate their safe disposal. Containers believed to have become reactive may require the temporary shutdown of the laboratory where the chemicals are contained, and other laboratories located adjacent to the route of disposal. This can be both an expensive and time-consuming process.

Laboratory personnel should purchase the smallest amount needed for an upcoming experiment. This will minimize quantities kept on site. Peroxide-formers should be purchased in an inhibited state. New containers of peroxide-formers should be checked for integrity and possible loss of contents.

Due to their hazardous nature this class of compounds has a shelf-life while in storage. Laboratory personnel must follow the chemical manufacturer's recommendations for the storage of these compounds. Peroxide-formers must be stored in a manner that minimizes exposure to air, light, heat, vibration, and shock. The container must be closed when not in use. They must also observe the chemical manufacturer's expiration date. (In most cases this expiration date is less than 24 months from the date of purchase.) Peroxide-forming chemicals must be dated when received from the chemical manufacturer and dated again when the container is opened.

Before opening containers of peroxide-forming chemicals laboratory personnel must inspect the container and its contents. If the contents appear to have evaporated, crystals have developed, the material is discolored, or if the container has been damaged the container must not be used and the Office of Research Safety must be contacted at ext. 8-6114 to arrange for disposal.

Peroxide test strips must be available in laboratories where peroxide-forming chemicals are handled or stored. Laboratory personnel must test the peroxide concentration each time at least

UT Health Science Center: RS001 Chemical Hygiene Plan	
Version 3	Publication Date: 02/06/2026

monthly or when the container is opened. If the test strip indicates that the peroxide concentration is greater than 30 ppm, the substance shall be re-stabilized and inhibited or the Office of Research Safety Affairs shall be notified immediately for disposal arrangements.

- **Perchloric Acid**
The handling of perchloric acid is particularly dangerous and should not be performed in any fume hood except those specially designed for perchloric acid use. Perchloric acid is a highly reactive material when in contact with incompatible materials. It can explode on contact with many organics and can form potentially explosive metal perchlorates through contact with metals. It is also forbidden from transport in concentrations >72%. Perchloric acid should be stored and used in glass or other inert, and preferably unbreakable, containers. Containers of perchloric acid must be labeled with the dates of receipt and opening.

- **Methylene Chloride (Dichloromethane)**
Methylene chloride (dichloromethane) must be handled in accordance with the requirements of the Methylene Chloride Exposure Control Plan included as Appendix A of this chemical hygiene plan and in accordance with university procedure HM5210 -Methylene Chloride Handling in Laboratories. Only handling practices that have been reviewed and approved by the Office of Research Safety Affairs are permitted. All handling of aliquots or open containers of methylene chloride must take place within a fume hood. Required personal protective equipment that must accompany the handling of methylene chloride includes gloves, a lab coat and eye protection. Many types of nitrile gloves are not recommended for protection from methylene chloride. Nitrile gloves may be used for protection from incidental contact and should be changed regularly if direct contact with methylene chloride occurs. Additional information about obtaining approval to handle methylene chloride, required handling practices, personal protective equipment, disposal requirements, and emergency response procedures are provided in the Methylene Chloride Exposure Control Plan.

- **Carcinogens, Reproductive Hazards and Acutely Toxic Chemicals**
Carcinogens include, but are not limited to, chemicals that meet one or more of the following criteria:
 - Regulated by OSHA as a carcinogen
 - Listed in the National Toxicology Program Annual Report on Carcinogens as a known human carcinogen or reasonably anticipated to be a human carcinogen
 - Listed by the International Agency for Research on Cancer as a human carcinogen, probable human carcinogen, or possible human carcinogen

UT Health Science Center: RS001 Chemical Hygiene Plan	
Version 3	Publication Date: 02/06/2026

- Listed by the National Institute for Occupational Safety and Health (NIOSH) as a potential occupational carcinogen
- Listed on the manufacturer’s SDS as a human carcinogen or possible human carcinogen.

Reproductive hazards include chemicals that may affect the reproductive health of women or men or the ability of couples to have healthy children. Reproductive hazards may cause problems such as infertility, miscarriage, and birth defects.

Acutely toxic chemicals include those defined as toxic under the TOSHA Hazard Communication Standard and may be fatal or cause damage to target organs as a result of a single exposure or exposures of short duration. TOSHA defines a toxic chemical as one that meets one of the following characteristics:

- Has a median lethal dose (LD50) of not more than 500 milligrams per kilogram of body weight when administered orally to albino rats weighing between 200 and 300 grams each.
- Has a median lethal dose (LD50) of not more than 1,000 milligrams per kilogram of body weight when administered by continuous contact for 24 hours with the bare skin of albino rabbits weighing between two and three kilograms each.
- Has a median lethal concentration (LC50) in air of not more than 2,000 parts per million by volume of gas or vapor, or not more than 20 milligrams per liter of mist, fume, or dust, when administered by continuous inhalation for one hour to albino rats weighing between 200 and 300 grams each.

Supervisors and their employees shall consider special provisions when handling carcinogens, reproductive hazards or acutely toxic chemicals. Whenever possible these materials should be handled within a chemical fume hood or other engineered enclosure. Additional provisions include the establishment of designated areas, use of appropriate personal protective equipment, decontamination procedures, and procedures for safe removal of contaminated waste.

Laboratory supervisors should consider establishing Designated Areas for the safe storage and handling of select carcinogens, reproductive hazards and acutely toxic chemicals. Supervisors should evaluate the need to establish a designated area based on the toxicity of the compound(s) being handled, the potential for personnel exposure, and potential for residual contamination. A fume hood, a section of a laboratory or an entire laboratory may be delineated as a Designated Area. When delineating a Designated Area, the area shall be marked with a sign or label with the following language “Caution - Designated Work Area - Select carcinogens, reproductive hazards, or substances of high acute toxicity may be present.”

UT Health Science Center: RS001 Chemical Hygiene Plan	
Version 3	Publication Date: 02/06/2026

Employees must regularly clean work areas used for carcinogens, reproductive hazards and acutely toxic chemicals. These areas must be cleaned with a suitable decontaminant. Refer to the SDS for decontamination procedures for specific chemical reagents. Supervisors and employees should be advised that hazardous drugs (e.g. antineoplastic agents, antiviral medications, tamoxifen, BrdU, cyclophosphamide, etc.) may not be suitably decontaminated with alcohol. A 1-10% bleach solutions is the required surface decontaminant for many hazardous drugs.

Empty containers used to hold carcinogens, reproductive hazards or acutely toxic materials can be discarded as conventional trash unless the contents were specifically identified by the EPA as U or P listed hazardous waste. In such situations the container itself must be discarded as hazardous waste or triple rinsed with a suitable solvent before being discarded. In such situations that rinsate must be discarded as hazardous waste. Materials used to clean spills of carcinogens, reproductive hazards or acutely toxic chemicals must be placed in an appropriate, sealable container, and discarded as hazardous waste.

COMPRESSED GASES

Compressed gases are defined as gases that are contained in a receptacle at a pressure not less than 280 kPA at 20 °C or as a refrigerated liquid. The following general guidelines for storing compressed gases must be followed for all compressed gases and in all laboratories. Refer to UTHSC policy HM5200 Compressed Gas Safety for detailed requirements for the handling and storage of specific compressed gases.

- Cylinders that are in use, meaning there is a regulator attached, must be individually secured by a chain or strap to a fixed building structure or component.
- Cylinders that are not in use must be stored with the valve cap on and secured to protect the valve.
- The regulator must be replaced with a safety cap when the cylinder is not in use.
- The safety cap must be in place when a gas cylinder is moved. For large gas cylinders (>27 inches), an approved gas cylinder cart should be used to move it.
- Compressed gas cylinders (cylinders) must be stored in a secure, well ventilated location, and in an upright position. Small cylinders such as lecture bottles are not required to be stored in the upright position; they can be safely laid down in a chemical cabinet. However, when lecture bottles are in use they should be secured and stored in an upright position if possible.
- All cylinders should be handled as if full and should never be completely emptied.

UT Health Science Center: RS001 Chemical Hygiene Plan	
Version 3	Publication Date: 02/06/2026

- Multiple cylinders may only be secured together if they are capped (not in use) and of compatible hazard class. Only capped cylinders can be secured with a single restraining device.

CHEMICAL WASTE

Hazardous waste is generally defined as waste that is dangerous or potentially harmful to human health or the environment. Hazardous waste regulations are strictly enforced by both the Environmental Protection Agency (EPA) and the Tennessee Department of Environmental Conservation. The Laboratory Supervisor is responsible for managing the hazardous waste program in a safe and compliant manner. No chemical waste should be poured down the drain or discarded in the trash without specific approval of the Office of Research Safety.

Hazardous waste falls into one of the following categories:

- Characteristic Wastes are wastes that exhibit one or more of the following properties:
 - Ignitable,
 - Corrosive,
 - Reactive, or
 - Toxic
- Listed Wastes are wastes from common manufacturing and industrial processes (F-listed), wastes from specific industries (K-listed), and wastes from commercial chemical products (U- and P-listed). Examples of U- and P-listed wastes sometimes handled in laboratories include cyclophosphamide, warfarin, epinephrine streptozotocin and other hazardous drugs. Empty containers of U- and P- listed materials must be handled as hazardous waste unless triple rinsed with a suitable solvent to remove any chemical residue. Rinsate used to clean waste containers must itself be discarded as hazardous waste.
- Universal Waste includes certain batteries (primarily rechargeable batteries such lithium, nickel-cadmium, nickel metal hydride, and mercury oxide), mercury-containing equipment (e.g., thermometers, thermostats), and certain lamps (e.g., fluorescent bulbs). Note: alkaline batteries and incandescent bulbs are not considered Universal Wastes and can be legally disposed of as trash.
- Mixed Waste consists of hazardous chemical waste mixed with radioactive waste.

EPA-regulated hazardous waste should not be mistaken for biological or radiological wastes.

- Waste Determinations
All chemical constituents in a hazardous waste container must be identified by knowledgeable laboratory personnel. Not only is this required by the EPA, it also ensures that waste can be properly characterized and disposed of by the Office of Research Safety or Campus Safety. If

UT Health Science Center: RS001 Chemical Hygiene Plan	
Version 3	Publication Date: 02/06/2026

there is uncertainty about the composition of a waste stream resulting from an experimental process, laboratory employees must consult the Laboratory Supervisor for assistance or the Office of Research Safety for assistance. In most cases, careful documentation and review of the SDS for all chemical products used in the experimental protocol will result in accurate waste stream characterization. Information contained within an SDS pertinent to making a hazardous waste determination can be found in specifically Section 2, “Hazard Identification” and Section 13, “Disposal Considerations.” If the composition of a waste is unknown and cannot be determined the Office of Research Safety may perform additional analysis on this material.

- Hazardous Waste Labeling**
 All waste must be properly labeled as soon the first drop of waste enters a waste container. Containers must be labeled and clearly marked with the words "Waste" or “Hazardous Waste” and list the chemical components of that waste. Hazardous waste labels are available on the Office of Research Safety website. These labels should be filled out in a percentage format as shown below. Listing accurate percentages is not as important (+ 5% is acceptable and constituents less than 1% can be listed as “trace”) as listing all of the chemicals that makeup the waste. If a chemical is found in the laboratory and the composition is unknown, it should be assumed to be hazardous and labeled as “Hazardous Waste – awaiting proper characterization”.

Hazardous Waste Label Example

HAZARDOUS WASTE
(Complete label in pen or pencil)

Dept.	Room
PI	Telephone

Handle with Care!

Write out full chemical name (No abbreviations)

Contents	%

Circle all that apply



For waste pickup email labsafety@uthsc.edu
or call 8-6114

Waste Storage

Hazardous waste containers in UTHSC laboratories are stored in satellite accumulation areas (SAA). SAAs are used to manage hazardous waste in laboratories and shops because doing so

UT Health Science Center: RS001 Chemical Hygiene Plan	
Version 3	Publication Date: 02/06/2026

provides safe and effective means to accumulate hazardous waste before removal by Campus Safety. Additionally, SAAs provide the least restrictive regulatory option for the accumulation and storage of hazardous waste containers. The following SAA rules must be followed managing hazardous waste in a laboratory:

- All waste must be stored in containers.
 - Containers must be in good condition and compatible with the waste they contain (no corrosive waste in metal containers).
 - Containers must be kept closed except when adding or removing waste.
 - Containers must be properly labeled.
 - Containers must be stored at or near the point of generation and under the control of the generator of the waste (wastes should remain in the same room they were generated in). A central waste collection room should not be established.
 - The waste storage volume should never exceed 55 gallons per SAA.
 - Containers should be segregated by chemical compatibility during storage (e.g., acids away from bases, secondary containment can be used as a means of segregation).
 - Avoid halogenated and non-halogenated wastes in the same waste container.
 - Avoid mixing incompatible waste streams in the same container (e.g., acids with bases, oxidizers with organic solvents) that will potentially create an exothermic reaction in the waste container.
 - Collect all highly toxic, reactive, mercury and any exotic wastes (e.g., dioxin compounds, PCBs, controlled substances) separately even if they are chemically compatible with other waste streams. Failing to do so can result in costly disposal fees (e.g., mixing mercury with an organic solvent waste means that the entire waste stream must be treated as mercury waste).
 - All spills and leaks must be cleaned up immediately. Spill clean-up waste must be bagged and discarded as hazardous chemical waste.
-
- **Waste Disposal Procedure**
Campus Safety provides pickup services for all chemical waste generated on the UTHSC campus. Requests a hazardous waste pickup by emailing labsafety@uthsc.edu and identifying the building and room number where the waste is located, the type of waste (e.g. methanol and stains), and the number of containers. Average turnaround time is 1-2 business days.
-
- **Liquid Chromatography Waste**
Liquid chromatography (LC) is an analytical technique used to separate, identify, quantify, and purify individual components of a mixture. This technique is very common in biological and chemical research. The most common type of LC at UTHSC is High Performance Liquid Chromatography (HPLC). UTHSC has numerous LC instruments located in campus

UT Health Science Center: RS001 Chemical Hygiene Plan	
Version 3	Publication Date: 02/06/2026

laboratories. Since organic solvents (e.g., methanol, acetonitrile) are commonly used in the process, most LC waste is regulated by the EPA as hazardous waste. Consequently, all containers collecting LC waste be properly labeled and acceptable to place a waste line running from the LC unit into an open waste container nor is it acceptable to use foil or Parafilm® as a means of closure must remain closed while the LC unit is in operation. It is neither acceptable to place a waste line running from the LC unit into an open waste container nor is it acceptable to use foil or Parafilm® as a means of closure.

Figure 11.5a - Improper LC Waste Collection Processes



Figure 11.5b - Proper LC Waste Collection Processes



- **Sharps Waste**
 Sharps are items capable of puncturing, cutting, or abrading the skin such as syringes, razor blades, scalpels, glass or plastic pipettes or broken glass. Sharps waste must be discarded in an FDA-approved sharps container labeled with the biohazard symbol. Refer to the Campus Safety

UT Health Science Center: RS001 Chemical Hygiene Plan	
Version 3	Publication Date: 02/06/2026

Regulated Medical Waste Policy (HM5201) for additional information about the handling of infectious sharps and regulated medical waste.

Clean uncontaminated broken glassware and plastic sharps should be placed in a broken glass box (available from General Stores in the GEB) equipped with a plastic garbage liner. Do not exceed 20 pounds. When ready for disposal, the box must be taped shut and prominently labeled as “Sharp Objects/Glass – Discard” or similar wording. Contact your Housekeeping supervisor of submit a Facilities request using the Archibus system to have the glass picked up.

HOUSEKEEPING

Housekeeping is a required element of the UTHSC laboratory safety program. A clean, well-maintained lab improves safety by preventing accidents and can enhance the overall efficiency of the work being performed. Observe the following laboratory housekeeping guidelines:

- Doorways and hallways must be free of obstructions to allow clear visibility and exit.
- The laboratory should be uncluttered without excessive storage of materials that could cause or support a fire (e.g., paper, cardboard, flammable liquids, etc.).
- Fire protection sprinklers must be unobstructed; a minimum of 18 inches of clearance is required below the sprinkler head.
- Do not store items that block fire extinguishers or eyewash and safety shower stations.
- Do not store items in front of electrical boxes/panels in the lab.
- A routine cleaning schedule should be established. All work surfaces should be kept as clean as possible. All potentially chemically contaminated work area surfaces (e.g., chemical fume hood deck, countertops) should be cleaned routinely (e.g. daily, weekly).
- For operations where spills and contamination are likely (e.g., agarose gel electrophoresis/ethidium bromide applications), cover workspaces with a bench paper or liner. The soiled bench paper should be changed on a routine basis or as needed.
- All chemical spills must be cleaned up immediately.
- Do not allow materials to accumulate in lab fume hoods and remove used tissues, foil, gloves, or other unnecessary objects immediately after use.
- Ensure that all waste (e.g., trash, chemically contaminated debris waste, etc.) is placed in the appropriate containers. Do not overfill waste containers.
- All equipment should be cleaned and returned to storage after each use.
- Equipment should be stored in a safe and orderly manner that prevents it from falling.
- Chemical containers must be clean, properly labeled, and returned to storage upon completion or usage.

UT Health Science Center: RS001 Chemical Hygiene Plan	
Version 3	Publication Date: 02/06/2026

- Avoid storing liquids above eye level.
- Do not store heavy or frequently used items on top shelves. Locate items used daily close to the work area.

EXPOSURE ASSESSMENT

Employees' airborne exposures to hazardous chemicals shall be below limits set by TOSHA (Tennessee Occupational Safety and Health Administration), ACGIH (American Conference of Governmental Industrial Hygienists), NIOSH (National Institute for Occupational Safety and Health), and/or AIHA (American Industrial Hygiene Association). Employees shall use engineering controls and work practices to minimize exposures to airborne hazardous chemicals. Where engineering controls and work practices are not sufficient to maintain exposures below exposure limits, employees shall use respiratory protection to reduce exposures below such limits.

- Occupational Exposure Limits
TOSHA maintains the following types of exposure limits:
 - Permissible Exposure Limit (PEL) - The PEL is an 8-hour time-weighted average exposure limit during a 40-hour work week, which shall not be exceeded.
 - Short Term Exposure Limit (STEL) - The STEL is a 15-minute time-weighted average exposure limit, which shall not be exceeded during the work day.
 - Ceiling Limit - The Ceiling Limit is an instantaneous exposure limit, which shall not be exceeded.

ACGIH maintains the following types of exposure limits:

- Threshold Limit Value-Time-Weighted Average (TLV-TWA) - The TLV-TWA is a time-weighted average concentration for a conventional 8-hour work day during a 40-hour work week, to which it is believed that nearly all workers may be repeatedly exposed, day after day, for a working lifetime, without adverse effect.
- Threshold Limit Value-Short Term Exposure Limit (TLV-STEL) - The TLV-STEL is a 15-minute time-weighted average exposure that should not be exceeded at any time during the work day. The TLV-STEL is the concentration to which it is believed that workers can be exposed continuously for a short period of time without suffering from (1) irritation, (2) chronic or irreversible tissue damage, (3) dose-rate dependent toxic effects, or (4) narcosis of sufficient degree to increase the likelihood of accidental injury, impaired self-rescue, or materially reduced work efficiency.

UT Health Science Center: RS001 Chemical Hygiene Plan	
Version 3	Publication Date: 02/06/2026

- Threshold Limit Value-Ceiling (TLV-C) - The TLV-C is the concentration that should not be exceeded during any part of the working exposure.

NIOSH maintains the following types of exposure limits:

- Recommended Exposure Limit (REL) - The REL is a 10-hour time-weighted average exposure limit during a 40-hour work week, which should not be exceeded.
- Short Term Exposure Limit (STEL) - The STEL is a 15-minute time-weighted average exposure limit, which should not be exceeded during the work day.
- Ceiling Limit - The Ceiling Limit is an instantaneous exposure limit, which should not be exceeded.

AIHA maintains the following types of exposure limits:

- Workplace Environmental Exposure Level - Time Weighted Average (WEEL-TWA) - The WEEL-TWA is an 8-hour time-weighted average exposure limit during a 40-hour work week, which should not be exceeded.
- Workplace Environmental Exposure Level - Short Term Exposure Limit (WEEL-STEL) - The WEEL-STEL is a 15-minute time-weighted average exposure limit, which should not be exceeded during the work day.
- Workplace Environmental Exposure Level - Ceiling Limit (WEEL-Ceiling Limit) - The WEEL Ceiling Limit is an instantaneous exposure limit, which should not be exceeded.

TOSHA standards are enforceable by law. ACGIH, NIOSH and AIHA exposure limits are consensus standards and not enforceable by law.

UTHSC generally uses the most stringent standard(s) for each hazardous chemical from TOSHA, ACGIH, NIOSH or AIHA as our institutional standard(s). Occupational exposure limits for specific chemical compounds can be found online in the NIOSH Pocket Guide to Chemical Hazards.

- Occupational Exposure Assessments
The Director of Research Safety manages the occupational exposure assessment program. Exposures are categorized based on the following criteria:
 - Nature of job task

UT Health Science Center: RS001 Chemical Hygiene Plan	
Version 3	Publication Date: 02/06/2026

- Quantity of hazardous chemical(s) handled
- Frequency of task
- Hazards associated with the chemical(s)
- Exposure limits for hazardous chemical(s)
- Exposure assessment data

Based on the categorization and assessment, exposures associated with specific job tasks are determined to be below or above exposure limits. Employees or supervisors may request an occupational exposure assessment by contacting the Office of Research Safety.

Periodic exposure monitoring is not necessary for those exposures, which are determined to be highly controlled (i.e., exposure less than 10% of the occupational exposure limit). Other exposures will be evaluated at a frequency to be determined by the Director of Research Safety, the affected employees, and supervisor of such employees.

- Recordkeeping
 The Office of Research Safety maintains copies of exposure assessment reports. Copies of exposure assessment reports are also distributed to the employee, his/her supervisor, and the Occupational Health Office. Exposure assessment reports are filed in the employee's medical record.

INFORMATION AND TRAINING

Effective training is crucial to a successful laboratory safety program. It is the responsibility of Laboratory Supervisors to actively participate in the training process to ensure that all lab employees are effectively trained before any work with hazardous materials occurs. The Office of Research Safety Affairs assists with this process by providing safety training on a variety of topics. However, training provided by the Office of Research Safety Affairs does not comprehensively address the hazards associated with specific experimental protocols or work areas.

Supervisors must provide job-specific chemical safety training to employees. Such training shall include a discussion of the specific physical and health hazards of chemicals in their work areas. Such training shall be provided at the time of their initial assignment, whenever a new hazard is introduced into their work area and at least annually.

- Laboratory Safety and Chemical Hygiene
 All laboratory employees (graduate students, lab technicians/managers, post-docs, visiting scientists, etc.) shall participate in annual Laboratory Safety and Chemical Hygiene training.

UT Health Science Center: RS001 Chemical Hygiene Plan	
Version 3	Publication Date: 02/06/2026

Such training is offered by the Office of Research Safety Affairs as an in-person class or as a computer-based course provided through the UTHSC Blackboard system and accessible through the Office of Research Safety Affairs training website. New employees and students working in labs are strongly advised to attend in-person training.

The annual Laboratory Safety and Chemical Hygiene training program covers the following topics:

- The contents of this Chemical Hygiene Plan
- TOSHA requirements
- Hazard communication
- Detection of hazardous chemicals in work areas
- Exposure assessments
- Safe work practices
- Engineering controls
- Personal protective equipment
- Standard Operating Procedures
- Medical consultation
- Hazardous wastes
- Chemical spill response

- Work Area Specific Training
Laboratory supervisors shall provide work area specific training to ensure that employees are adequately informed about the hazards and procedures associated with the activities they are required to perform within their work area. This include completing the hazard communication training for specific chemical hazards, SOPs, proper use PPE, engineering controls and other potential hazards located in their work area. The general format for safety training to be provided along with each work activity is as follows:
 - Identifying the hazards
 - Signs or symptoms of exposure
 - Mitigating the hazard (engineering controls, administrative controls, PPE)
 - How to respond in the event of exposure

- Documentation

UT Health Science Center: RS001 Chemical Hygiene Plan	
Version 3	Publication Date: 02/06/2026

Supervisors shall keep records of job-specific chemical safety training provided to employees. Such records shall include employee names, dates of training, and brief descriptions of the training. The Office of Research Safety shall maintain a record of training provided online or through classes offered through that office.

EMERGENCY PROCEDURES FOR ACCIDENTS AND SPILLS

Chemical spills in the laboratory can pose a significant risk to human health and the environment. All lab personnel must be trained on how to properly respond to chemical spills in order to minimize risk. In general, chemical spills can be placed into one of two categories: nonemergency chemical spills, or emergency chemical spills.

- **Non-Emergency Chemical Spill Procedures**

Non-emergency chemical spills are generally defined as spills involving a material, a quantity and in a location that the employee has been trained to handle. For example, a small spill of a routinely handled chemical reagent on a fume hood benchtop.) These spills can be cleaned up by properly trained lab personnel using conventional lab PPE (e.g., safety glasses/goggles, lab coat, gloves) and a lab spill kit. In general, when a non-emergency spill occurs in the lab the area around the spill should be isolated, everyone in the lab should be made aware of the spill, and the spilled material should be absorbed and collected using either pads or some other absorbent material such as oil dry or kitty litter. Decontamination of the spill area should be conducted using an appropriate solvent (soap and water is often the most effective). Proper PPE must be worn and only trained personnel should conduct the cleanup after reviewing the SDS(s) (specifically Section 6, “Accidental Release Measures”) to obtain chemical-specific cleanup information.

- **Emergency Chemical Spill Procedures**

Emergency chemical spills are spills of any hazardous material in a quantity or location that the employee has not been trained to handle. These spills are generally more than a liter in volume and involve a highly toxic or reactive compound, present an immediate fire or environmental hazard, or require additional PPE (e.g., respirator) and specialized training to properly cleanup. The following procedures should be followed in the event of an emergency chemical spill:

- Cease all activities and immediately evacuate the affected area (make sure that all personnel in the area are aware of the spill and also evacuate).
- If chemical exposure has occurred to the skin or eyes, the affected personnel should be taken to the nearest safety shower and eyewash station.
- Dial 8-4444, which will contact the UTHSC Police Department (UTHSC PD). The UTHSC PD will contact the Office of Research Safety to initiate an emergency chemical

UT Health Science Center: RS001 Chemical Hygiene Plan	
Version 3	Publication Date: 02/06/2026

spill response and clean-up. If the situation is, or could become an emergency (e.g., chemical exposure has occurred, a fire or explosion has occurred) the UTHSC PD will be able to contact the appropriate authorities (e.g. fire department, administration, etc.) Be prepared to provide the following information:

- Name of person reporting
- Any injuries or exposures
- The location of the spill (building and room number).
- The type of material(s) and approximate volume spilled.
- Control measures already implemented.
- Control access to the spill location until the spill response team arrives. This can be done by closing doors, posting signs or otherwise preventing personnel from entering the vicinity of the spill or areas where toxic vapors may be present.
- Chemical Spill Kits
Each laboratory must have a spill response kit available for use. Lab spill kits can either be purchased from a vendor or created by lab personnel, but each spill kit should be equipped to handle small spills of the most common hazards in the laboratory. Spill response and cleanup materials that should be in the kit include:
 - Absorbent materials such as pads, booms, oil dry or kitty litter.
 - Neutralizing agents (e.g., Spill X) for acids and/or bases if high volume of acids and/or bases are stored in the laboratory.
 - Containers such as drums, buckets, and/or bags to containerize spilled material and contaminate debris generated during the cleanup process.
 - PPE such as gloves, safety glasses and/or goggles, lab coat or apron, chemical-resistant booties.
 - Caution tape or some other means to warn people of the spill.

EXPOSURE RESPONSE

Employees shall be informed how to respond to exposures as part of the hazard communication training associated with the specific hazards that they encounter in their work area. This shall include first aid information such as that provided in the first aid section of a SDS. Incidents must also be reported in accordance with the procedure detailed in Office of Research Safety policy RS-102: Incident Reporting.

Accidents/injuries and hazardous agent exposures must be reported to a supervisor immediately.

UT Health Science Center: RS001 Chemical Hygiene Plan	
Version 3	Publication Date: 02/06/2026

- In a medical emergency that is life-threatening or results in serious bodily injury, employees must call 911 or go to the nearest hospital emergency room. The employee’s supervisor or a family member should call the CorVel 24-hour nurse line at 1-866-245-8588 to report the incident.
- For non-emergency injuries, employees and their supervisor must call the CorVel 24-hour nurse line at 1-866-245-8588. A nurse will determine if your injury will require self-care, or urgent care and provide you with the nearest authorized medical provider.
 - If the injury only requires self-care, this would be an incident only claim and no further action would be needed with CorVel.
 - When medical treatment is needed, supervisors must make a follow-up phone call to CorVel. Failure of the supervisor to call CorVel and complete the First Notice of Loss will result in the department being fined by the State.
 - On the University of Tennessee Risk Management website, there are links to the “Incident Report,” “Lost Time/Return to Work Calendar,” and “Employee and Supervisor Instructions” forms. When warranted by the nature of the incident or injury completed by employee’s and their supervisor. Once completed, form must be forwarded to your campus HR/WC representative.
 - Every attempt must be made to report the incident within 48-hours of becoming aware of the incident.
 - Concerns related to health, safety and compliance in research may be reported by contacting the Office of Research Safety at 448-6114 or emailing labsafety@uthsc.edu.

MEDICAL CONSULTATION

Employees must notify their Laboratory Supervisor of all injuries and illnesses regardless of the magnitude. If the injury is serious and presents an emergency situation, dial 8-4444 and emergency. In a medical emergency that is life-threatening or results in serious bodily injury, employees must call 911 or go to the nearest hospital emergency room. The employee’s supervisor or a family member must call the CorVel 24-hour nurse line at 1-866-245-8588 to report the incident. Employees must then report the injury to the UT Office of Risk Management by completing the [online incident report form](#) (select Employee Injury) accessible through the Campus Safety website. Upon calling Corvel, a nurse will determine if your injury will require self-care, or urgent care and provide you with the nearest authorized medical provider. If the injury only requires self-care, this would be an incident only claim and no further action would be needed with CorVel.

Student and visitor injuries must be reported to the UT Office of Risk Management using the [online incident report form](#) (select General Liability).

UT Health Science Center: RS001 Chemical Hygiene Plan	
Version 3	Publication Date: 02/06/2026

Employees, who work with hazardous chemicals, have an opportunity to receive medical consultations and/or examinations from the Occupational Health Office under the following circumstances:

- Exposures that cause an employee to experience signs or symptoms associated with a hazardous chemical.
- Airborne exposures to hazardous chemicals that exceed occupational exposure limits
- Exposures resulting from a spill, leak, explosion, or other occurrence.

Medical consultations and examinations are performed by or under the direct supervision of a licensed healthcare practitioner.

APPENDIX A: METHYLENE CHLORIDE EXPOSURE CONTROL PLAN

INTRODUCTION

The University of Tennessee Health Science Center is committed to providing a safe and healthful work environment for our entire staff. In pursuit of this endeavor, the following exposure control plan (ECP) is provided to eliminate or minimize occupational exposure to methylene chloride (synonyms: dichloromethane, DCM, CH₂Cl₂) in accordance with OSHA standard 29 CFR 1910.1052 (Methylene chloride) and the EPA's ruling for "Methylene Chloride; Regulation Under the Toxic Substances Control Act (TSCA)" published in the Federal Register on May 8, 2024, that became effective on July 8, 2024.

The ECP is a key document to assist our institution in implementing and ensuring compliance with the standard, thereby protecting our personnel. This ECP includes:

- Implementation of various methods of exposure control, including:
 - Elimination of DCM use
 - Substitution with less hazardous alternatives
 - Engineering controls
 - Administrative controls
 - Personal protective equipment (PPE)
- Communication of hazards to employees and training
- Determination of employee exposure
- Recordkeeping

UT Health Science Center: RS001 Chemical Hygiene Plan	
Version 3	Publication Date: 02/06/2026

The methods of implementation of these plan elements are discussed in the subsequent following ECP.

PURPOSE, SCOPE AND APPLICABILITY

The purpose of this ECP is to document the actions taken to mitigate exposure to methylene chloride. This includes controlling methylene chloride exposure to a concentration that is below the EPA Existing Chemical Exposure Limit (ECEL) of 2 parts per million (ppm) as an eight-hour time-weighted average (8-hr. TWA) and below the EPA Short Term Exposure Limit (EPA STEL) of 16 ppm averaged over 15 minutes.

This ECP covers all laboratories and work areas where methylene chloride is handled and is applicable to all employees, students and visitors with the potential to be exposed (i.e., potentially exposed persons) to methylene chloride.

PROGRAM ADMINISTRATION

- The Director of Research Safety Affairs, henceforth identified as the Chemical Hygiene Officer, is responsible for the implementation of the ECP.
- The Chemical Hygiene Officer will maintain, review, and update the ECP at least annually, and whenever necessary to address changes such as new or modified tasks and procedures. The Chemical Hygiene Officer can be contacted by emailing safety@uthsc.edu or calling 901-448-6114 during regular business hours.
- Personnel who are determined to have potential exposure to methylene chloride (i.e., potentially exposed persons) must comply with the procedures and work practices outlined in this ECP.
- The Principal Investigator will maintain and provide all necessary personal protective equipment (PPE), engineering controls (e.g., chemical fume hoods, local exhaust ventilation, etc.), and chemical waste labels as required by the standard. The Principal

UT Health Science Center: RS001 Chemical Hygiene Plan	
Version 3	Publication Date: 02/06/2026

Investigator will ensure that adequate supplies of the aforementioned equipment are available in the appropriate sizes.

- The Sr. Lab Safety Specialist will be responsible for providing training, documentation of training, ensuring the written ECP available to employees and inspecting laboratories for compliance with the provisions of this ECP. The Sr. Lab Safety Specialist can be contacted by emailing safety@uthsc.edu or calling at 901-448-6114 during regular business hours.

EMPLOYEE EXPOSURE DETERMINATION

The following is a list of job classifications in which employees at our institution may have the potential for exposure to methylene chloride. Included is a list of tasks and procedures, or groups of closely related tasks and procedures, in which exposure may occur for these individuals. The exposure category for each similar exposure group (SEG) is based on the AIHA Exposure Control Categories identified below.

Management and Exposure Control Categories	
<i>SEG Exposure Control Category**</i>	<i>Applicable Management/ Controls</i>
0 (<1% of OEL)	no action
1 (<10% of OEL)	procedures and training, general hazard communication
2 (10-50% of OEL)	+ chemical specific hazard communication, periodic exposure monitoring
3 (50-100% of OEL)	+ required exposure monitoring, workplace inspections to verify work practice controls, medical surveillance, biological monitoring
4+ (>100% of OEL, Multiples of OEL; e.g., based on respirator APFs)	+ implement hierarchy of controls, monitoring to validate respirator protection factor selection

Location	SEG / Task	Exposure Category

UT Health Science Center: RS001 Chemical Hygiene Plan	
Version 3	Publication Date: 02/06/2026

College of Pharmacy Building, 5 th and 6 th Floor	Analytical/Synthesis procedures using DCM. Products and waste remain in fume hood.	1
Van Vleet Building, 1 st Floor	Hazardous Waste Storage/Disposal.	1

METHODS OF CONTROL

The hierarchy of controls will be utilized to identify possible controls to limit the potential for methylene chloride at concentrations believed by the US EPA to present an unacceptable risk of injury to health. This includes the following:

Elimination: Laboratories will eliminate the use of methylene chloride whenever it is feasible to do so.

Substitution: Laboratories will substitute the use of less hazardous alternatives to methylene chloride whenever it is feasible to do so. Laboratories will periodically (e.g., annually) evaluate opportunities to substitute less hazardous alternatives through a literature review, discussion with appropriate subject matter experts, or other applicable means.

Engineering Controls: All handling of methylene chloride must take place within a chemical fume hood that has been evaluated within the past 12 months.

The following engineering controls are not permissible:

Laboratory snorkels: This type of laboratory local exhaust ventilation does not provide effective capture to control methylene chloride exposures below the ECEL and EPA STEL.

UT Health Science Center: RS001 Chemical Hygiene Plan	
Version 3	Publication Date: 02/06/2026

Dilution Ventilation: Dilution ventilation does not adequately control methylene chloride exposures below the ECEL and EPA STEL.

Work Practices:

Personnel will be trained in appropriate work practices and use of equipment, including PPE, to ensure the safe handling of methylene chloride. This training must include the requirement to handle methylene chloride within a properly functioning fume hood and the use maintenance and limitations associated with PPE used during methylene chloride handling activities.

The following administrative controls are not permissible:

Personnel rotation is not a permissible practice for maintaining exposures below the ECEL and STEL. This practice of limiting exposure is prohibited by regulation.

PPE:

Personnel will use PPE to provide protection from dermal contact. This includes at least gloves, a lab coat and eye protection. Nitrile gloves may be used for protection from incidental contact when direct contact with methylene chloride is not anticipated. Gloves must be changed if contact with methylene chloride occurs.

If direct contact with methylene chloride is anticipated personnel must use gloves made of one of the following materials:

- Polyethylene (PE)/ethylene vinyl alcohol (EVOH),
- Laminate,
- Viton gloves

Nitrile or neoprene gloves are recommended to wear over the aforementioned glove types as double gloving prevents punctures and tears. Gloves should be inspected frequently while in use.

UT Health Science Center: RS001 Chemical Hygiene Plan	
Version 3	Publication Date: 02/06/2026

Personnel using PPE must observe the following precautions:

- Wash hands immediately or as soon as feasible after removal of gloves or other PPE.
- Remove PPE after it becomes contaminated, and before leaving the work area.
- Contaminated PPE may be disposed of in a sealed container stored in a chemical fume hood.
- Wear appropriate gloves when handling or touching contaminated items or surfaces; replace gloves if torn, punctured, contaminated, or if their ability to function as a barrier is compromised. Reusable chemical protective gloves may be decontaminated for reuse if their integrity is not compromised; discard reusable chemical protective gloves if they show signs of cracking, peeling, tearing, puncturing, or deterioration.
- Wear appropriate face and eye protection when splashes, sprays, spatters, or droplets of hazardous chemicals pose a hazard to the eye, nose, or mouth.
- Remove immediately or as soon as feasible any garment contaminated by hazardous chemicals in such a way as to avoid contact with the outer surface.

ENGINEERING CONTROL IMPLEMENTATION

To ensure that engineering controls perform adequately to control methylene chloride exposures the following will occur:

Regular Inspections: Laboratory fume hoods performance will be evaluated at least annually in accordance with ANSI/ASHRAE Standard 110: Methods of Testing Performance of Laboratory Fume Hoods. Other local exhaust ventilation (e.g., slotted hoods, grossing stations, etc.) will be

UT Health Science Center: RS001 Chemical Hygiene Plan	
Version 3	Publication Date: 02/06/2026

commissioned in a manner that confirms performance in a manner consistent with manufacturer specifications.

Training: Personnel will be trained to properly utilize laboratory fume hoods and local exhaust ventilation at the time they are assigned to use this equipment.

Proper use of laboratory fume hoods includes:

- Maintaining the fume hood sash below the indicated height of operation and as low as practical.
- Working at least 6 inches from the front of the hood.
- Positioning equipment within the hood in a manner that will not prevent the hood from adequately capturing contaminants. Large equipment should be avoided inside a fume hood.
- Upon hearing a fume hood alarm, immediately secure materials, stop working within the hood, and completely lower the sash until the issue has been corrected.
- Contact Facilities by calling the main line at 901-448-5661 or by submitting a DASH request for fume hood repairs or to address operation issues. The Office of Research Safety Affairs will verify proper operation of the laboratory fume hood once repairs are completed and will place it back in operation if it has passing safety evaluation criteria.

REGULATED AREAS

There are presently no Regulated Areas on campus where potentially exposed persons have the potential to be exposed to methylene chloride concentrations that exceed the EPA ECEL or STEL.

Regulated areas must be demarcated with a sign that states, “Danger: Regulated Area. Methylene chloride, authorized personnel only. Respiratory protection and protective clothing are required.” Access to regulated areas will be restricted only to individuals that have been trained and authorized to enter. Training content will include the information identified in the Training section of this document as well as instructions on the proper use, maintenance and limitations of PPE. Individuals entering regulated areas will participate in a medical surveillance program by completing the methylene chloride medical surveillance questionnaire at least annually and submitting it for review to the health care provided identified by the institution.

UT Health Science Center: RS001 Chemical Hygiene Plan	
Version 3	Publication Date: 02/06/2026

HOUSEKEEPING

The following housekeeping guidelines must be followed to minimize the potential for methylene chloride.

- Containers such as glassware, empty containers, bins and pails (e.g., wash or emesis basins) containing methylene chloride residue must be allowed to dry in a chemical fume hood prior to cleaning or disposal.
- Broken glassware which may be contaminated is picked up using mechanical means, such as a brush and dustpan.
- Wet, contaminated PPE including lab coats or gloves should be allowed to fully evaporate in a fume hood prior to laundering. Contaminated laundry should be handled as little as possible, with minimal agitation. Alternatively, wet, contaminated laundry should be placed in leak-proof, labeled container for transport to a laundry facility or for disposal.

HAZARDOUS WASTE MANAGEMENT

Methylene chloride and methylene chloride-containing waste ($\geq 0.1\%$ by weight) must be managed and disposed of as hazardous waste. Such waste must be placed in containers which are chemically compatible, in good condition, closable, constructed to contain all contents and prevent leakage, appropriately labeled (see Hazardous Waste label below), and closed prior to removal to prevent spillage or protrusion of contents during handling. Personnel should consider containers full and request a waste pickup by emailing safety@uthsc.edu once a container reaches 90% of its capacity.

Empty containers of methylene chloride must be placed in a fume hood to provide sufficient time for residual methylene chloride to evaporate before the container can be disposed as conventional trash. This is necessary to ensure that personnel downstream from laboratories (e.g., Custodial Services personnel, personnel in the vicinity of waste containers) are not exposed to methylene chloride in a concentration that may exceed the EPA ECEL or STEL.

Hazardous Waste Label

UT Health Science Center: RS001 Chemical Hygiene Plan	
Version 3	Publication Date: 02/06/2026

HAZARDOUS WASTE
(Complete label in pen or pencil)

Dept.	Room
PI	Telephone

Handle with Care!

Write out full chemical name (No abbreviations)

Contents	%

Circle all that apply



For waste pickup email labsafety@uthsc.edu
or call 8-6114

TRAINING

Personnel handling methylene chloride must be trained on the content of this ECP prior to handling methylene chloride. The ECP is included as an attachment in the [Chemical Hygiene Plan](#). The Chemical Hygiene Plan can be viewed at any time in the university Safety Manual.

EXPOSURE RESPONSE, REPORTING AND POST-EXPOSURE EVALUATION

In case of exposure to methylene chloride individuals should respond immediately by obtaining first aid. They must then report the incident, and should follow up by visiting University Health Services or the clinical care provider assigned by the Corvel.

Inhalation: Individuals should move to fresh air. The odor threshold for methylene chloride is 25-150 parts per million. Individuals able to smell methylene chloride may be exposed about the exposure limit.

UT Health Science Center: RS001 Chemical Hygiene Plan	
Version 3	Publication Date: 02/06/2026

Skin Contact: Wash affected areas thoroughly using soap and water. If necessary, remove contaminated clothing to prevent additional exposure.

Eye Contact: Use an emergency eyewash station to rinse eyes for at least 15 seconds.

Report injuries and exposures in accordance with [RS102 – Incident Reporting](#). Employees must contact the Corvel 24/7 nurse line at 1-866-245-8588 and notify UT Risk Management by completing the [online incident report form](#) (select On-the-job Injury). Students must notify UT Risk Management by completing the [online incident report form](#) (select General Liability).

INCIDENT INVESTIGATION

When an accident occurs, the employee’s supervisor or lead employee should investigate the accident. The area where the accident occurred should be examined and statements should be obtained from any witnesses. Questions regarding the accident/incident report should be direct to the Risk Management Office. A Supervisors Report of Employee Accident form is available by visiting <https://www.uthsc.edu/hr/employee-relations/workers-compensation.php>.

The Office of Research Safety Affairs shall review claims received by the Corvel system. RSA shall investigate those where a hazardous material is implicated, where appropriate safety procedures were not followed or where personal protective equipment was not used or was defective.

RECORDKEEPING

Training records are completed for each employee upon completion of training. These documents will be kept for at least three years by the employee, the employee’s supervisor, and within the Office of Research Safety Affairs. Employee training records are provided upon request to the employee or the employee's authorized representative within 15 working days. Such requests should be addressed to the Office of Research Safety Affairs.

Occupational exposure assessment results are maintained by the Office of Research Safety Affairs. Results will be shared with the employee, their supervisor, and University Health Services within 15-days of receipt.

UT Health Science Center: RS001 Chemical Hygiene Plan	
Version 3	Publication Date: 02/06/2026

OSHA Recordkeeping

An exposure incident is evaluated to determine if the case meets OSHA’s Recordkeeping Requirements (29 CFR 1904). This determination and the recording activities are done by the Office of Research Safety Affairs.

In addition to the 1904 Recordkeeping Requirements, all percutaneous injuries from contaminated sharps are also recorded in the Sharps Injury Log. All incidences must include at least:

- the date of the injury
- the type and brand of the device involved
- the department or work area where the incident occurred
- an explanation of how the incident occurred.

This log is reviewed at least annually as part of the annual evaluation of the program and is maintained for at least five years following the end of the calendar year that they cover. If a copy is requested by anyone, it must have any personal identifiers removed from the report.

Penalties/Disciplinary Action for Non-Compliance

Non-compliance with the requirements of this Chemical Hygiene Plan may result in disciplinary action of employees or students and/or civil or criminal penalties.

Responsible Official & Additional Contacts

Subject Matter	Office Name	Telephone Number (xxx) xxx-xxxx	Email/Web Address
Policy Clarification and Interpretation	Research Safety Affairs	(901) 448-6114	safety@uthsc.edu
Policy Training	Research Safety Affairs	(901) 448-6114	safety@uthsc.edu

UT Health Science Center: RS001 Chemical Hygiene Plan	
Version 3	Publication Date: 02/06/2026

Safe handling of laboratory chemicals	Research Safety Affairs	(901) 448-6114	safety@uthsc.edu
---------------------------------------	-------------------------	----------------	------------------

Related Policies/Guidance Documents

OSHA

29CFR1910.1450: Occupational Exposure to Laboratory Chemicals

TDL Rule 0800-1-9

NFPA: 45, 306, 654, 49

TOSHA: Act of 1972 50-3-101: 50-3-919

[SA0100 - Safety and Environmental Health Program](#)

[SA0400 - Hazardous Material Safety](#)

[RS003 - Laboratory Safety Inspections](#)

[RS101 - Minors in Laboratories](#)

[RS102 - Incident Reporting](#)

[RS104 - Lab Closures](#)

[RS104 - Procedure for New Labs](#)

[RS202 - Controlled Substances in Research](#)

[HM5200 - Compressed Gases](#)